



AMERICAN SPECIALTIES, INC.


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 0377-0378

ISSUED: 1-87

REVISED: 8-04

SURFACE MOUNTED SOAP RESERVOIR

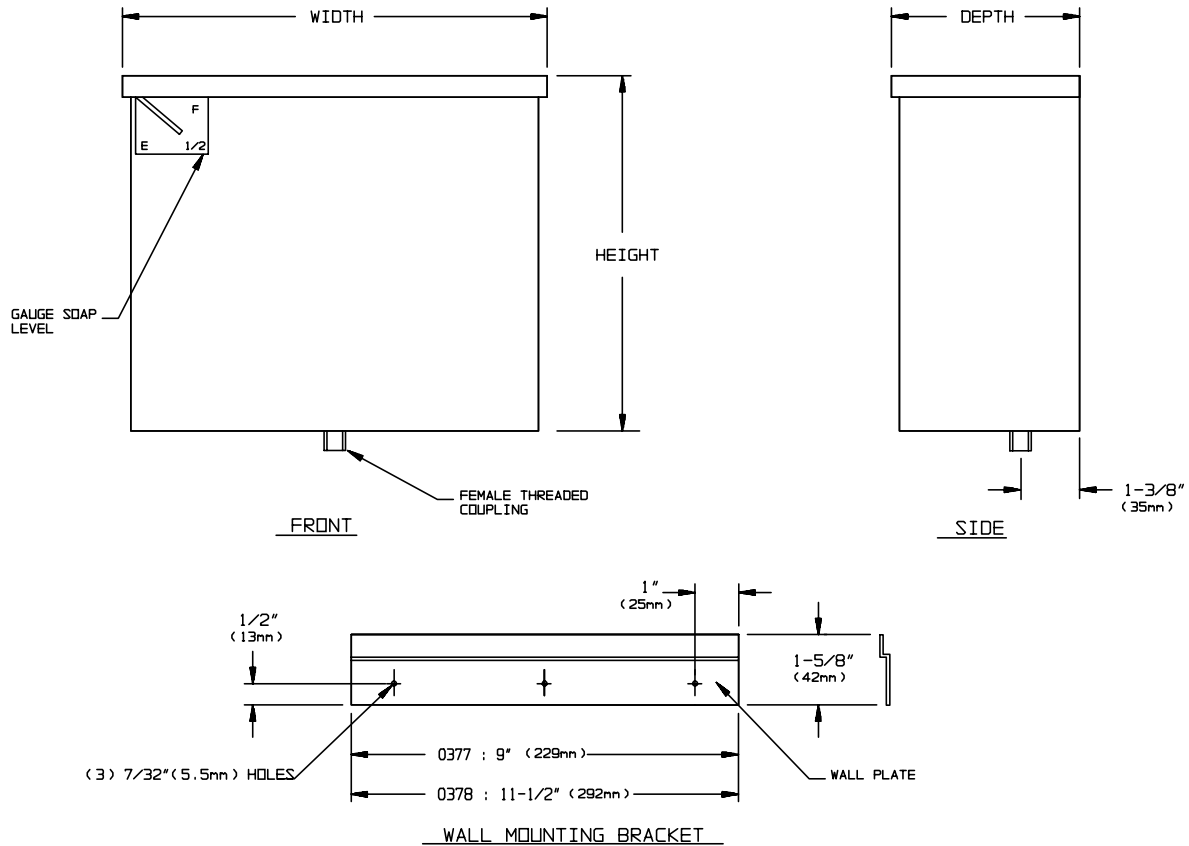

SPECIFICATION

Surface Mounted Soap Reservoir Unit shall have a capacity of 1 to 2-1/2 gallons (see chart). Reservoir tank and top cover shall be fabricated of alloy 18-8 stainless steel, type 304, 22 gauge. All exposed surfaces shall be N° 4 satin finish and be protected during shipment with a PVC film easily removable after installation. Bottom of tank shall be fitted with a 3/8" NPT female coupling. Tank shall have no exposed fastening devices or spot welded seams. A leak proof positive acting liquid level indicator shall be provided. A separate concealed stainless steel wall plate with mounting holes shall be provided.

Surface Liquid Soap Reservoir shall be Model :

N° 0377		N° 0378
---------	--	---------

 as manufactured by American Specialties, Inc. 441 Saw Mill River Road Yonkers, New York 10701-4913

INSTALLATION

Wall plate is anchored to wall or partition through three (3) concealed mounting holes. Reservoir is then installed over wall plate. Recommended mounting location is 6" minimum above soap valves. Recommended soap valves are Models N° 0375 or N° 0353.

OPERATION

Soap is dispensed by opening shut-off valve on unit. A level gauge on unit indicates amount of soap in tank. Unit may be reloaded at anytime with a partial load in-place. Tank supply is replenished manually on cycle determined by maintenance needs.

OPTIONS

Model N°	Capacity in Gallons (L)	Width (mm)	Height (mm)	Depth (mm)
0377	1 (3.8)	9-7/8" (251)	8-1/4" (210)	4-3/8" (111)
0378	2-1/2 (9.5)	12-3/8" (314)	10" (254)	5-3/4" (146)

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.