



**AMERICAN SPECIALTIES, INC.**


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 0340

ISSUED: 1-87

REVISED: 3-99

**SURFACE MOUNTED LIQUID AND ANTISEPTIC SOAP DISPENSER**

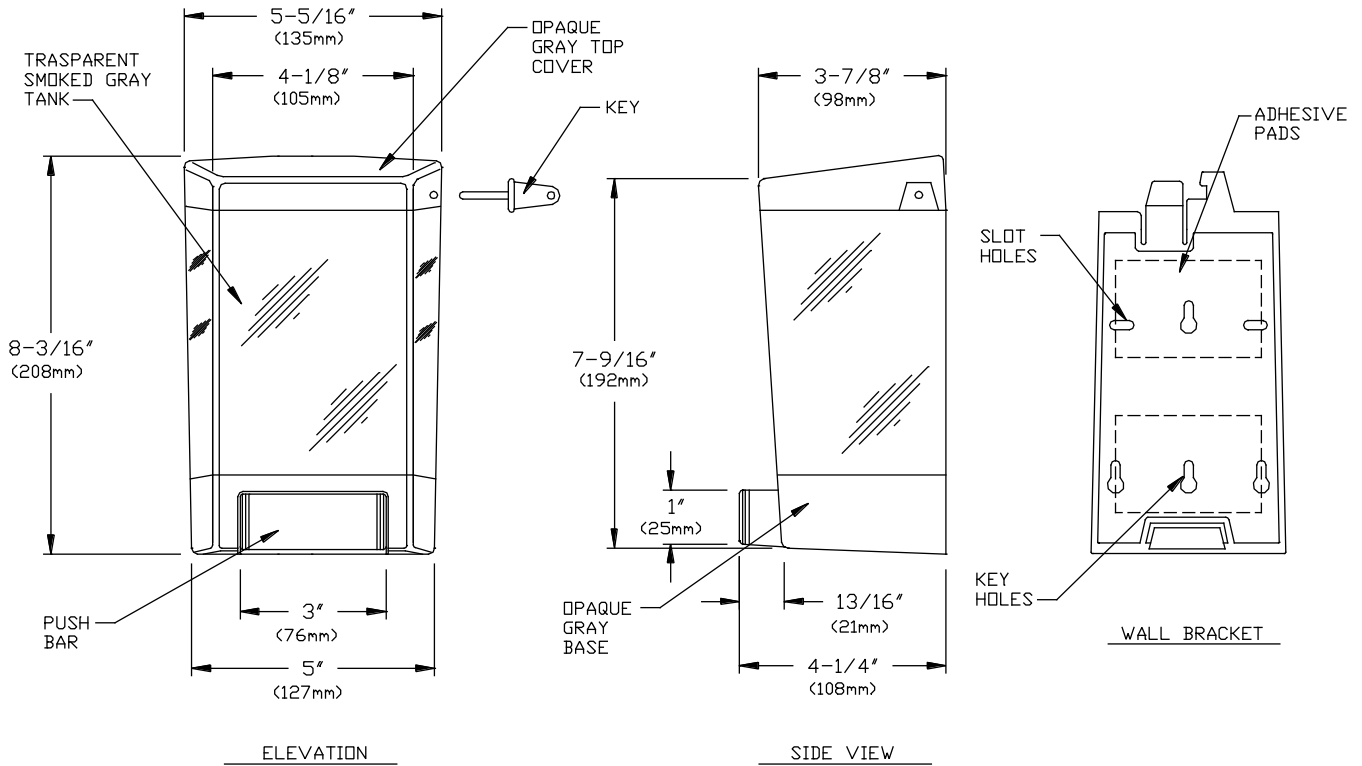

**SPECIFICATION**

Surface Mounted Liquid soap dispenser shall hold and dispense up to 46 oz (1.36liter) of a wide variety of antiseptic and liquid soaps, shampoos, lotions or detergents. Unit shall not dispense liquid material containing abrasives such as pumice. Dispenser shall be fabricated of transparent smoked gray tank and opaque gray base, push bar and cover. Valve shall be constructed of concealed plastic body with stainless steel and plastic internal parts. Valve operation shall comply with ADA Accessibility Guidelines by requiring no more than 5 lbs<sub>f</sub> (22.2 Newtons) pressure to actuate and require no grasping or twisting by operator. Unit cover shall be sloped and shall overlap edges to prevent top use as a shelf and to keep water spray out. Cover shall be retained by a concealed locking release.

**Surface Mounted Liquid and Antiseptic Soap Dispenser shall be Model N° 0340 of American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913**

**INSTALLATION**

Unit is surface mounted to wall or partition by means of a bracket (bracket & hardware provided). Unit is secured to concealed bracket and locked in place by concealed snap latch. For maximum usability and compliance with ADA Accessibility Guidelines, unit should be installed so that valve is 54" (1372mm) max. above finished floor (AFF) when clear floor side reach access is provided or 48" (1219mm) max. AFF if clear floor forward reach access is provided or 46" (1168mm) max. AFF if side reach over an obstruction only is provided (i.e.: vanity). Recommended installation for general utility is 42" (1066 mm) AFF or 6" (152mm) minimum above wash basin.

**OPERATION**

Soap is manually dispensed by depressing push bar. Unit is refilled through tamper resistant top cover. Soap tank will continue to feed properly until empty. Tank supply is refilled manually on cycle determined by maintenance needs. Clear tank provides continuous view of soap level.

**Accessory Specialties**

**AMERICAN DISPENSER**

**Desert Ray Products**

**WATROUS INC.**