

PRODUCT FACT SHEET

<u>STINGER®</u> RECHARGEABLE FLASHLIGHT

MARKET

APPLICATIONS: Law Enforcement, Sporting Goods, Security, Fire & Rescue, Hardware/Tool, Automotive, Industrial,

Consumer

DESCRIPTION: The Stinger® is a compact, powerful, rechargeable flashlight.

CASE MATERIAL: Machined aluminum housing that is anodized against corrosion inside and out.

DIMENSIONS: Length: 7.38 in. (18.7 cm) Diameter: Major Diameter: 1.60 in. (4.06 cm)

Body Diameter: 1.08 in. (2.74 cm)

WEIGHT: 10 ounces (284 grams) with battery (included with purchase)

LENS: Unbreakable polycarbonate lens with scratch-resistant coating.

LIGHT SOURCE: Xenon gas-filled bi-pin bulb with 30 hour life. Spare stored in the end cap. Variable spot to flood beam.

LIGHT OUTPUT:

11,000 candela peak beam intensity and 210m beam distance when focused to spot.

90 lumens measured system output.

ON/OFF:

Push-button head switch. Momentary or constant on.

RUN TIME: BATTERY:

Ih 15min

1.25 hours to 10% of initial lumen output level.

3-cell, 3.6 Volt Ni-Cd sub-C battery, rechargeable up to 1000 times.

3-cell, 3.6 Volt Ni-MH sub-C battery, rechargeable up to 1000 times offered in 230VAC and 12VDC European

systems.

CHARGING: 10 hour overnight charger-holder, available with 100V, 120V, 230V, 240V AC or 12V DC charge cords.

2.5-hour fast charger or PiggyBack® charger model available.

FEATURES: IPX4 rated design; water resistant operation.

2 meter impact resistance tested.
Serialized for positive identification.

Snap-in charger holder that mounts in any position. LED charge-continuity indicator on charger holder

WARRANTY: Streamlight's Limited Lifetime Warranty warrants this product to be free of defect for a lifetime of use.

We will repair, replace or refund the purchase price, at our option, of any Streamlight product that does not work as a result of a manufacturing defect for as long as you own it. This limited lifetime warranty excludes abuse, batteries, bulbs, chargers, switches, electronics and normal wear and tear. Rechargeable

batteries, chargers, switches and electronics have a two (2) year warranty with proof of purchase.

APPROVALS*: UL Listed for Class I, II Division 2. (UL) USTED


Most models meet applicable European Community directives. **CE**

OPTIONAL

ACCESSORIES: Safety wands, red lens cover, infra-red lens cover, ring holder, holster, 5-Unit Back Charger, 2.5-hour fast

charger or PiggyBack® charger that allows simultaneous charging of the light and a spare battery.

STINGER PERFORMANCE CURVE

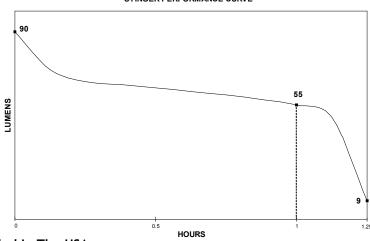

All performance claims tested to ANSI/NEMA FL1-2009 Standard

Issued: 10/01/04 Revised: 06/27/11 Rev: 3

Assembled In The USA.

Document #101

^{*} See product for specific ratings.